



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup>:

H01L 25/03

A1

(11) International Publication Number:

WO 96/13109

(43) International Publication Date:

2 May 1996 (02.05.96)

(21) International Application Number: PCT/EP95/04087

(22) International Filing Date: 18 October 1995 (18.10.95)

(30) Priority Data:

P 9402196

21 October 1994 (21.10.94)

ES

(71) Applicant (for all designated States except US): ALCATEL N.V. [NL/NL]; Burgemeester Elsenlaan 170, NL-2288 BH Rijswijk (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PEREZ ABADIA, Mariano [ES/ES]; Tarragona, 25, 4. Izquierda, E-28045 Madrid (ES). NÚÑEZ LEON DE SANTOS, Gregorio [ES/ES]; Diputación, 7, E-45004 Toledo (ES). FERNANDEZ DURAN, Alfonso [ES/ES]; Camino Real, 19, E-28229 Villanueva del Pardillo (ES).

(74) Agents: KNECHT, Ulrich, Karl et al.; Alcatel SEL AG, Zentralbereich Patente und Lizenzen, Postfach 300 929, D-70449 Stuttgart (DE).


(81) Designated States: AU, CA, FI, PL, RU, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

## Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: ADAPTIVE EQUALISER

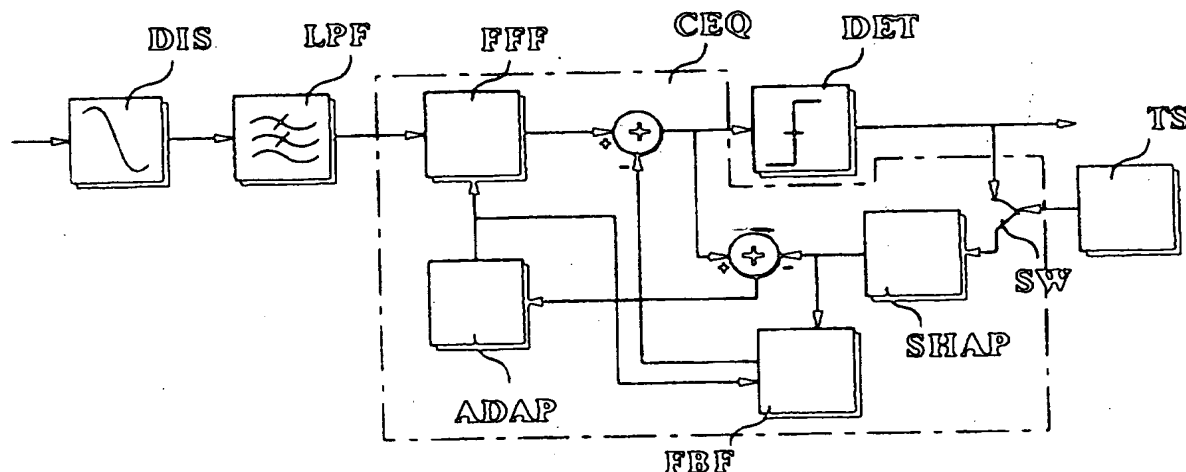

## (57) Abstract

Of particular application in equalising digital signals with analogue modulation, where use is made of a training sequence formed by a previously known sequence of symbols which is applied to said equaliser simultaneously with the demodulated signal present in the receiver. In this way a first estimate is made of the coefficients of the filter or filters of the equaliser that compensate the linear distortions in the transmission channel. The training sequence (TS), before being used in the equaliser (CEQ), is first applied to a lowpass filter whose transfer function is the same as that of the premodulation filter employed in the modulator. This transfer function also incorporates distortion effects, both linear and non-linear, to which the data are subjected in the receive side when they have been demodulated prior to their detection or regeneration.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## ADAPTIVE EQUALISER

### OBJECT OF THE INVENTION

This invention refers to an equaliser of the adaptive type employed in transmission systems where the transmission channel does not have a flat  
5 transfer function, but where, due particularly to multipropagation effects, the signal at the receiver input includes linear distortion that considerably impairs its quality.

To correct these effects, use is made of channel equalisers the purpose of which is to compensate these effects by means of certain mathematical  
10 algorithms. These algorithms converge towards an error signal with value zero or sufficiently small when the signals they receive are subject, during reception, to a linear process; however, the same does not occur, or at least not at the same speed, when the signals are subjected to a significantly non-linear process.

15 The object of this invention is to develop a channel adaptive equaliser that can be applied to the reception of signals subjected to deterministic linear and/or non-linear processes.

### BACKGROUND OF THE INVENTION

The use of frequency modulation techniques of the GFSK type, like  
20 that employed in the Digital European Cordless Telecommunications (DECT) standard, make it advisable to use frequency demodulators based, for example, on discriminators; in this way it is possible to recover the data by means of a simple threshold detector in order to decide between the two logic states, 0 or 1.

25 In certain environments where these systems are applied, this type of receiver is sufficient because the maximum spread of the signal at the receiver is considerably less than one symbol and, consequently, the intersymbol interference produced in the channel is hardly appreciable. However in applications where radio coverage is greater, the latter is not  
30 true. In such situations it becomes advisable to make use of equalisers that remedy this signal-degrading effect resulting in the error probability of recovered symbols being notably enhanced.

For this reason, use is made of an equaliser of the type illustrated in the article "Adaptive equalisation for DECT systems operating in low time-  
35 dispersive channels" by J. Fuhl and G. Schultes, published in the magazine

Electronics Letters of November 25, 1993, vol. 29, No.24, pages 2076 and 2077.

In this article use is made of an equaliser of the type DFE (Decision Feedback Equaliser) well known. In it, the training sequence employed is the 16-bit burst synchronisation as defined by the DECT. The training sequence  
5 is stored in a ROM and applied to the equaliser at the moment when the 16 bits appear at the receiver input, instead of the actually received signal. This prevents the possible errors produced in the detector, when the filter coefficients are still inexact, from being fed back to the equaliser and, therefore, a faster convergence occurs.

10 Nevertheless, when the demodulator is of the non-linear type like, for example, a frequency discriminator, even under ideal conditions of propagation, the demodulated signal can be considerably distorted due to the action of the demodulator. Under these conditions, adequate convergence does not occur, since no allowance is made for the non-linear process to  
15 which the received signals are subjected.

#### CHARACTERISATION OF THE INVENTION

The technical problem stated above is overcome by the application of this invention which permits the use of non-linear demodulators combined with adaptive equalisers for the equalisation of digital signals with analogue  
20 modulation that makes use of a training sequence formed by a previously known symbol sequence.

In the equaliser training phase, this sequence is applied to the equaliser simultaneously with that received in order to make thereby a first estimate of the coefficients of the filter or filters of the equaliser.

25 So as to make possible and hasten the convergence of the coefficients mentioned, the training sequence is not constituted by the digital symbols transmitted but, instead, it is formed by a cadence of samples that represents the training sequence just as it would be received at the output of the demodulator in the absence of noise and of multipropagation.

30 Thus, the new training sequence is obtained through the application of a lowpass filter whose transfer function is the same as that of the premodulation filter employed in the modulator and, thereby, allowance is made for the prior linear distortion due to the filtering that occurs in the modulator.

35 Subsequently the non-linear distortion effects to which the data are

- 3 -

subjected in the reception side during demodulation and prior to their detection or regeneration, are included; and, finally, the effects of the predetection filter for limiting noise bandwidth are incorporated and which can partly filter out the high-frequency components of the signal.

5 With the application of this invention, a much more realistic convergence of the equaliser filter coefficients takes place since allowance is made for really all prior impairment effects suffered by the signal that is actually applied to the equaliser, whereby the error probability for the same noise conditions is considerably improved.

#### 10 **BRIEF FOOTNOTES TO THE FIGURES**

Below a fuller explanation of the invention is given in a description of an implementation based on the figures attached, in which:

- figure 1 shows a general block diagram of the final part of a receiver based on a frequency discriminator without equaliser,
- 15 - figure 2 shows part of the above diagram, in which an equaliser of the type known as DFE has been included,
- figure 3 shows the previous case but in which a signal-shaping module that is applied to the training sequence, in accordance with the invention, has been incorporated,
- 20 - figure 4 shows the configuration of a demodulator based on a frequency discriminator,
- figure 5 shows, in the form of functional blocks, the different effects that the signal suffers on its way to the demodulator and which are taken into account in the shaping of the signal that is feedback to the equaliser, and
- 25 - figure 6.A shows the waveform of the training sequence employed in the DFE according to the state of the art, and figures 6.B and 6.C those employed according to the invention, including, respectively, only the premodulator filter and the series of effects, both linear and non-linear, in the receive side.

#### 30 **DESCRIPTION OF AN IMPLEMENTATION OF THE INVENTION**

This invention, in a preferred implementation, finds application in the receiver of a digital communications system with GFSK modulation, which is the type employed in the Digital European Cordless Telecommunications (DECT) system.

35 Figure 1, as already mentioned, shows part of the receive side used, in

which a frequency conversion takes place to an intermediate frequency; in it, the modulated signal  $X_i$  is first applied to a bandpass filter FI, the bandwidth of which is that of the channel, in order to suppress out-of-band noise as well as other components resulting from the earlier mixing and which are located  
5 outside the band (mainly image frequency).

Subsequently it is applied to an amplitude limiter LIM, the function of which is to clip the input signal so that, at its output, the signal amplitude is always constant. This means the demodulation of the signal can be performed without recurring to automatic gain control processes. Since this is  
10 a system with frequency modulation and constant envelope, when filtering the clipped signal again with an intermediate frequency filter, the original signal is obtained but, this time, with an amplitude that is always constant.

A frequency discriminator DIS is then employed, the structure of which is shown in figure 4. As already known, this is a multiplier M, which  
15 is a non-linear element that multiplies the signal to be demodulated by another which is the derivative of the first and shifted in phase by 90°.

The fact that the phase shift for each symbol period is not perfectly defined, as occurs with GMSK for example, makes phase demodulation practically unfeasible.

20 The output signal from the frequency discriminator DIS is applied to a lowpass filter LPF to remove the noise, especially that of the highest frequencies the effect of which is the most pernicious since, as is known, the spectral noise density at the output of a frequency demodulator is of the parabolic type.

25 Finally the output signal from the above lowpass filter LPF is sent to a symbol detector DET which, in the simplest form, is a comparator with a reference level that corresponds to that which the demodulator would provide in the absence of a modulating signal; that is, when only the carrier is received. In this event, the values above the reference level are equivalent  
30 to one logical value and, below it to the other logical value. Clearly much more complex detectors can be used, which give a lower probability of error under the same noise conditions, but this has no effect on the object of the invention.

Initially, the DECT system was used in reduced environments where  
35 the maximum delay was much less than a symbol period, consequently the

multipropagation effect was hardly significant and channel equalisation was unnecessary. Nevertheless, later usage in environments of greater coverage results in that the channel model presents serious impairments which can be corrected by using equalisers.

5 This is possible, as has now been proposed in various articles, by employing the synchronising sequence of the DECT bursts as training sequences for the proposed equaliser.

With reference to all of the foregoing, figure 2 shows part of a receiver used in the DECT. It includes an equaliser CEQ of the type known as DFE  
10 (Decision Feedback Equaliser) that uses an RLS adaptation algorithm, since there are only 16 bits available for the filter coefficients to reach suitable values.

This equaliser is situated just before the symbol detector DET and has a frequency domain response that compensates for the non-linear response  
15 curve of the channel resulting from the distortion in it. In this way, the signal that enters the symbol detector DET, when equaliser convergence has been completed, would be free from pernicious effects due to the linear distortion in the channel over which the signal coming from the associated transmitter is received.

20 In this type of equaliser, in order to reach convergence faster, use is made of a training sequence that is already known at both ends. This means that, even when the initial values of the coefficients of the equaliser CEQ are far from the values they should finally have (which would result in a high number of detector errors and consequently a very slow or even unattainable  
25 convergence), there is more rapid and certain convergence since the data feedback to the equaliser CEQ in question are correct.

This is also shown in figure 2 in which the training sequence TS, which in this case for DECT is the burst synchronising sequence, is stored in a logic  
30 circuit and is feedback to the equaliser CEQ via the switch SW when the arrival of said synchronising sequence is expected within the burst starting to be received. When the sequence has been received fully, the switch SW changes position in order then to feedback the data recovered by the symbol detector DET, which now correspond to information bits.

35 Nevertheless, along the transmission chain as far as the input to the symbol detector DET, the signal goes through different elements that distort

it both linearly and non-linearly, which are not initially allowed for in the equalisation process. For this reason, as can be seen in figure 3, a wave-shaping module SHAP is included which receives the symbols that are feedback to the equaliser CEQ, either of the training sequence or of the actual  
5 output symbols from the detector, accordingly.

The transfer function is a table of values that have been obtained experimentally by applying the training sequence in the transmitter, before the modulator, and taking the corresponding readings of the signal obtained at the input to the symbol detector DET.

10 Figure 5 shows symbolically what elements are taken into account in the transfer function of the wave-shaper SHAP and which are, on the transmission side, the premodulation Gaussian filter GFIL and the frequency modulator FMOD and, in the reception side, the amplitude limiter LIM, the frequency discriminator DIS and the lowpass filter LPF in predetection.

15 The filters introduce a linear distortion that produces an increase in the intersymbol interference, while the frequency modulator FMOD and the frequency discriminator DIS introduce non-linear distortion because the voltage-frequency conversion characteristic in one case and the frequency-voltage characteristic in the other are not constant as they would be in an  
20 ideal situation. These effects are also allowed for by the equaliser.

When the training phase of the equaliser CEQ has been completed and convergence has been reached, the adaptation algorithm, which is developed in a calculation module ADAP, is frozen, whereby the coefficients calculated in both filters, that of current symbols FFF and that of past symbols FBF, are  
25 held constant until the end of the burst.

Alternatively, and according to a selection made in the equaliser, when the training sequence has been received, the data obtained at the output of the detector DET are feedback, maintaining the adaptation algorithm active.

30 To demonstrate more clearly the improvement produced by the invention on the equaliser, figure 6.A shows the training sequence employed in an equaliser according to the state of the art; on the other hand, figure 6.B shows the same training sequence as received at the input of the detector DET in the absence of noise and in the event that all the elements in the chain  
35 up to the detector input are ideal. According to the invention, the wave-



shaper SHAP incorporates, at least, this effect.

Finally figure 6.C shows again the training sequence that is received at the input of the detector DET in the absence of noise and taking into account the non-ideal effects of the elements mentioned above. In the complete  
5 application of the invention, the wave-shaper SHAP incorporates all these effects, which are stored in a read-only memory (ROM).

An equaliser, as is known, in the training phase performs a "comparison" between the known training sequence and the signal received at the input to the decision circuit, such that an error signal is obtained, the  
10 mean square value of which tends asymptotically to zero. As the signal at the input to the equaliser takes the form of the sequence in figure 6.C but to which is added noise and linear distortion due to the effects of the channel, it can be seen that if the comparison is made with the sequence of figure 6.C, the convergence is faster and more precise than if it is done with the sequence  
15 of figure 6.B which only takes into account the premodulation Gaussian filter and, naturally, much more than if the sequence employed is that of figure 6.A which only contemplates the actual bits in the training sequence.

Definitively then, the result is improved error probability.

**CLAIMS**

1.- **ADAPTIVE EQUALISER** for equalising digital signals with analogue modulation and which makes use of a training sequence formed by a previously known sequence of symbols and which is applied to the equaliser simultaneously with the reception of the same in order to, in this way, perform an initial estimation of the coefficients of the filter or filters of the equaliser; said equaliser being **characterised** in that the sequence employed in its training phase is the result of applying the training sequence (TS) to a lowpass filter whose transfer function is the same as that of the premodulation filter (GFIL) employed in the modulator.

2.- **ADAPTIVE EQUALISER** according to claim 1, **characterised** in that the sequence employed in the training phase includes also the effects of distortion, both linear and non-linear, that the data experience in the receive side when they have been demodulated and prior to their detection or regeneration.

3.- **ADAPTIVE EQUALISER** according to claim 2, **characterised** in that said effects of distortion, both linear and non-linear, are obtained by readings at the output of the demodulator when the corresponding carrier modulated by the training sequence is applied to the input of the receiver.

4.- **ADAPTIVE EQUALISER** according to claim 1, **characterised** in that to obtain the sequence employed in the training phase, the training sequence is applied to a data shaping table (SHAP) which implements the transfer function that includes the effects of distortion mentioned.

5.- **ADAPTIVE EQUALISER** according to claim 4, **characterised** in that when the training phase has been completed, said equaliser (CEQ) freezes the adaptation algorithm so that the coefficients of its filters remain constant until the end of the burst that is being received.

6.- **ADAPTIVE EQUALISER** according to claim 4, **characterised** in that, once the training phase has been completed, when the equaliser (CEQ) is in the tracking phase, the data obtained by the detector (DET) that are fed back to the adaptive equaliser, are first passed through the data shaping table (SHAP) so that during the tracking phase, allowance is also made for the effects of both linear and non-linear distortion suffered by the signal present at the input to the detector (DET).

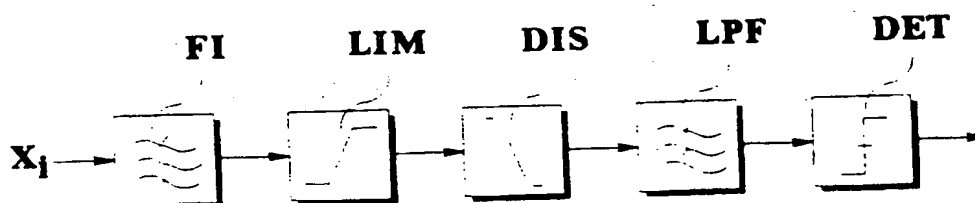


FIG. 1

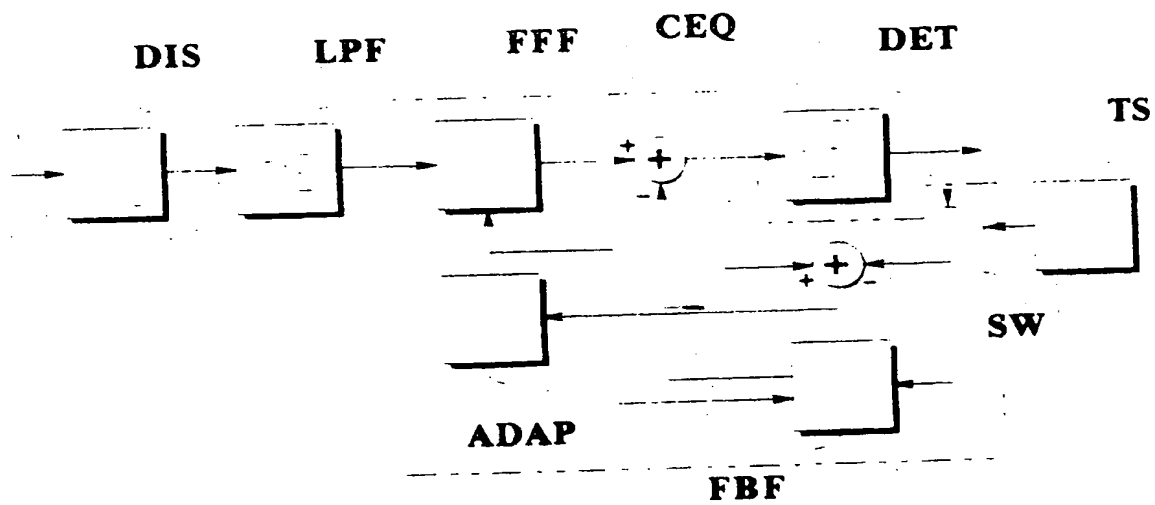


FIG. 2

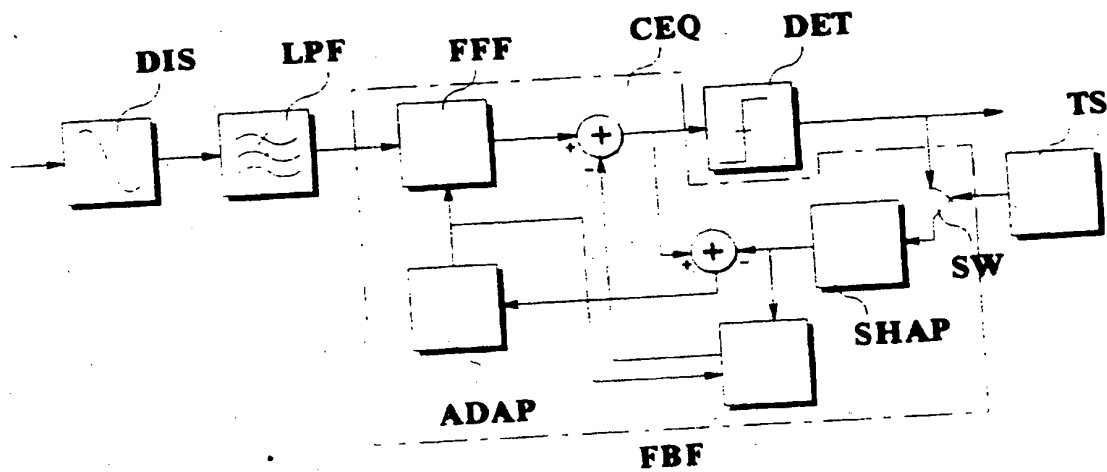


FIG. 3

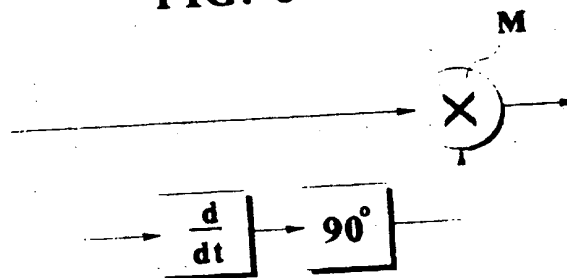


FIG. 4

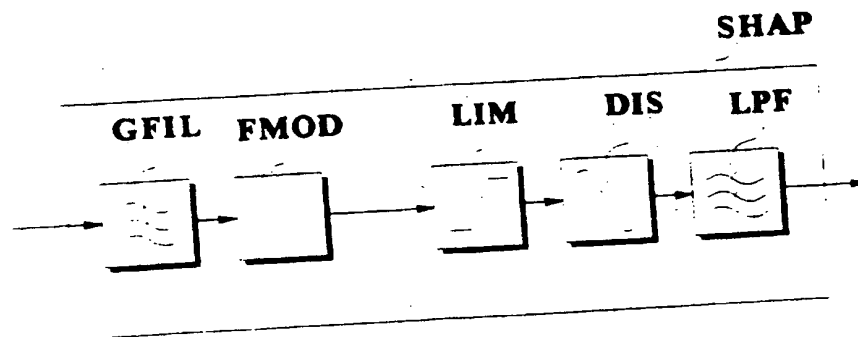


FIG. 5

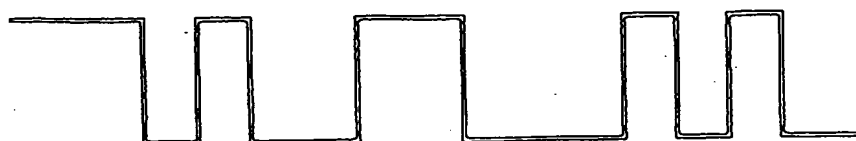


FIG. 6.A



FIG. 6.B



FIG. 6.C

# INTERNATIONAL SEARCH REPORT

Internat'l Application No  
PCT/EP 95/04087

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04L25/03

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ICC '93 GENEVA. IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS '93. TECHNICAL PROGRAM, CONFERENCE RECORD (CAT. NO.93CH3261-5), PROCEEDINGS OF ICC '93 - IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, GENEVA, SWITZERLAND, 23-26 MAY 1993, ISBN 0-7803-0950-2, 1993, NEW YORK, NY, USA, IEEE, USA, pages 761-765 vol.2, XP 000371187 CHOW J S ET AL 'Equalizer training algorithms for multicarrier modulation systems' see page 762, left column, line 35 - page 763, left column, line 5 --- -/--	1-6

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

21 February 1996

Date of mailing of the international search report

06.03.96

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Canali, F

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 95/04087

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 601 855 (JAPAN RADIO CO., LTD) 15 June 1994 see page 5, line 42 - page 6, line 6 see page 10, line 42 - line 51 see page 12, line 41 - line 53 ---	1-6
A	PATENT ABSTRACTS OF JAPAN vol. 016 no. 453 (E-1267) ,21 September 1992 & JP,A,04 159826 (NEC CORP) 3 June 1992, see abstract -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 95/04087

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
---	---------------------	----------------------------	---------------------

EP-A-601855

15-06-94

JP-A- 6177801

24-06-94

JP-A- 6188786

08-07-94

JP-A- 6188787

08-07-94

CA-A- 2110881

10-06-94

-----



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**